
USER GUIDE · VERSION 1.1

Sleuth.

Find any tag, in any drawing, on any drive. Even when the PDF is a scan.

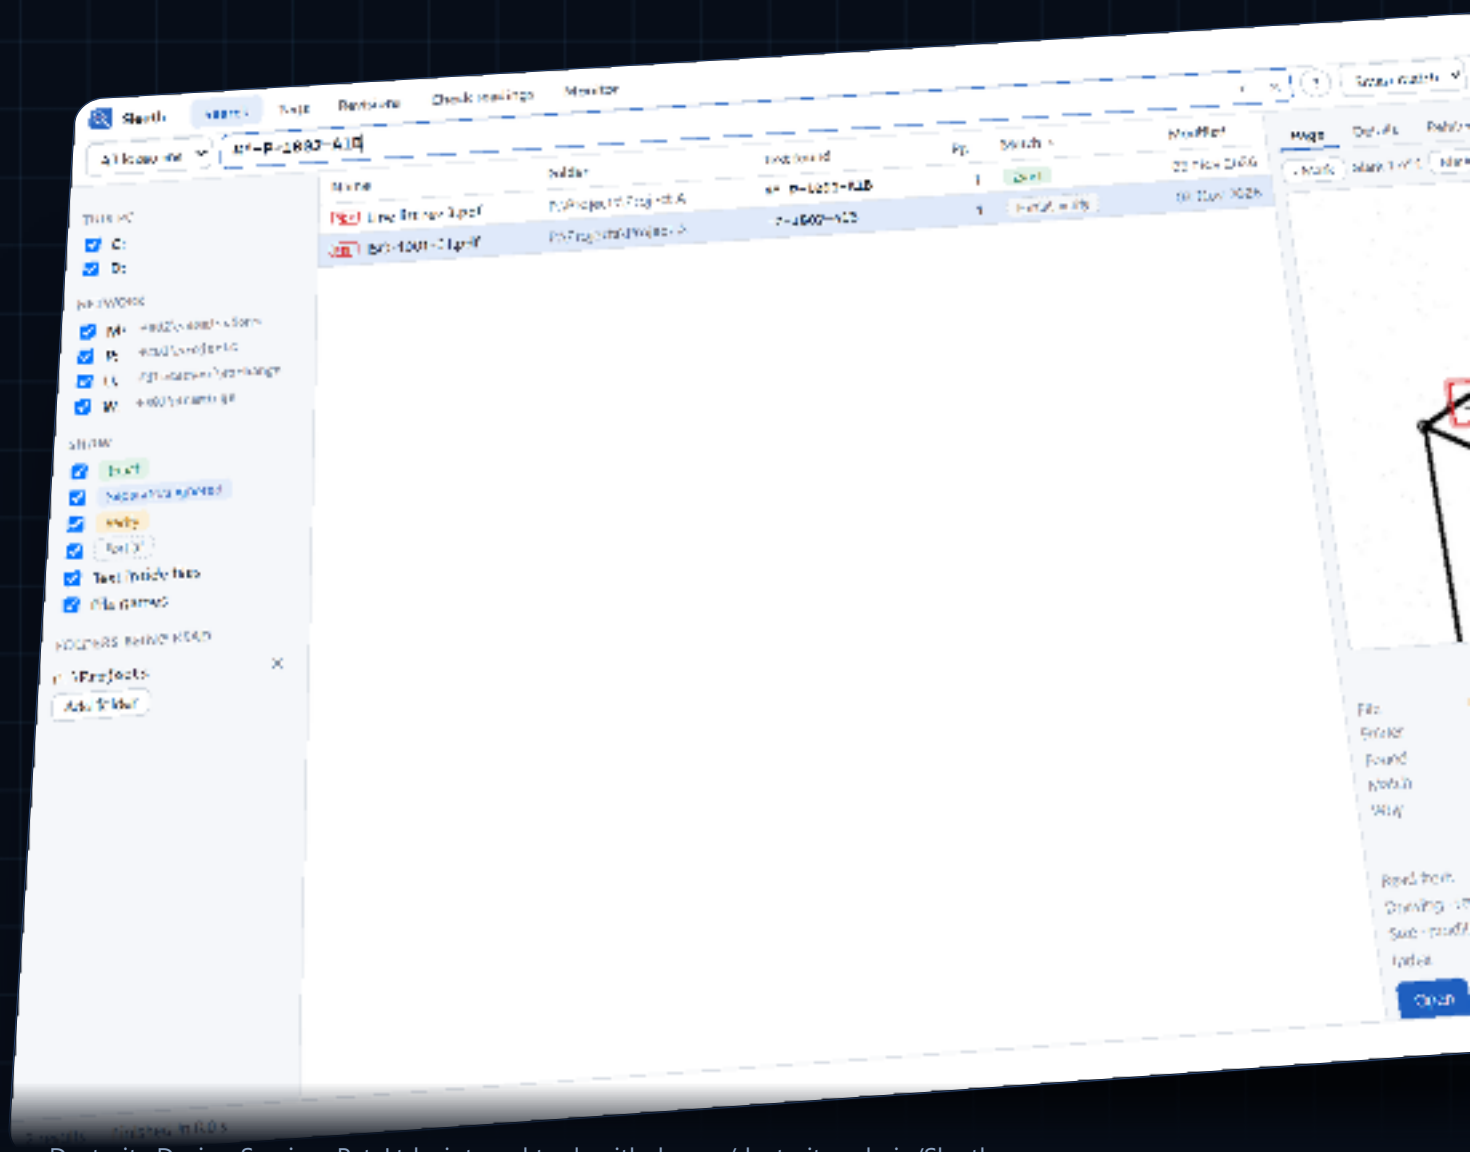

Contents

1 What Sleuth is

2 Installing Sleuth

3 First-time setup

4 A tour of the window

5 Searching

6 How results are labelled, and when to double-check

7 Previewing and opening files

8 Deep search: when you don't know where it is

9 Background reading and the index

10 Tags: every tag and where it appears

11 Revisions: what changed between two issues

12 Details and related drawings

13 Check readings

14 Monitor

15 Projects and the office server

16 The office index folder

17 Settings reference

18 Updates

19 Troubleshooting and FAQ

20 Your data, privacy and uninstalling

21 Quick reference card

Find by any text
Tag numbers, line numbers, document numbers, notes:

Even in scans
Sleuth reads scanned and plotted PDFs with OCR, so text

See the proof
Each result opens on its page with the text circled in red.

anything printed on a drawing, or written in a spreadsheet, document, email or CAD file.

with no text layer is found too.

1 What Sleuth is

Sleuth is our office's search tool for drawings and documents. Type a tag and it shows every file that contains it, which page or sheet it's on, and the spot on the page.

Windows search, and tools like Everything, only look at file names, or at text that a PDF already carries. Most of our drawings are scans or plots with no text inside, so those tools can't find a line number printed on an isometric. Sleuth reads every page once, including scans, and remembers what it read. Searches then take a fraction of a second.

What Sleuth does for you

- **Finds text inside drawings**, including scanned and plotted PDFs, with OCR that reads small print, rotated and vertical text.
- **Reads every common file type**: Excel, Word, PowerPoint, Outlook emails, text and CSV, AutoCAD DWG and DXF, MicroStation DGN (including PDS `.i01` isometrics) and scanned images, as well as PDF.
- **Understands tags**: `6"-P-1001-A1B`, `6-P-1001-A1B` and `6P1001A1B` are the same tag to Sleuth.
- **Searches every drive**: your own disks and every mapped network drive, without freezing when a share is slow or offline.
- **Shows the evidence**: every hit opens on its page with the text marked, so you confirm it with your own eyes.
- **Shares the work**: the office keeps one index, in the office folder on `U:`. A document read on any PC is not read again on yours, and one PC lists each network drive for everyone.

How it works, in one paragraph

Sleuth has two parts. The **Sleuth window** is what you search in. The **Sleuth reader** is a background program that keeps a list of file names on your drives and reads the documents in the folders you choose. It slows down when you're busy and speeds up when the PC is idle. Everything it learns goes into the **office index** in `U:\Sleuth-cache`, shared by every PC, which is why searches are instant and nothing large is kept on your PC.

> **For engineering use**
> Sleuth helps you find drawings; it does not certify them. When a result is labelled `Verify, OCR unsure`, or when the tag matters for a deliverable, open the page and read the tag yourself. Sleuth always shows you where to look.

2 Installing Sleuth

Sleuth installs for your Windows account only. You don't need administrator rights, and it takes about a minute.

1. Open **github.com/dexterity-admin/Sleuth/releases/latest** and download `Sleuth_1.0.1_x64-setup.exe` (about 56 MB), or use the copy IT shared.
2. Run it. Because the installer is not code-signed, Windows may show **"Windows protected your PC"**. Click **More info**, then **Run anyway**. You only see this for the first install; updates install from inside Sleuth.
3. Click through the installer. Sleuth starts when it finishes, and adds a Start-menu entry.

> **For IT**
> Silent install: `Sleuth_x.y.z_x64-setup.exe /S`. To choose the folder, add `/D=C:\Tools\Sleuth` as the last argument.

What gets installed

Item	Where	What it is
Sleuth	`%LOCALAPPDATA%\Programs\Sleuth`	The window (`sleuth.exe`), the reader (`sleuth-worker.exe`), the PDF engine, the OCR models and LibreDWG (reads AutoCAD files)
Your settings	`%APPDATA%\Sleuth\settings.json`	Folders to read, cache folder and options. Updates never touch this file.
This PC's working files	`%LOCALAPPDATA%\Sleuth`	A few MB: the list of this PC's own disks, readings not yet added to the office index, and logs
The office index	`U:\Sleuth-cache`	Shared by every PC: the list of files on the network drives and the text read from documents

Requirements


- Windows 10 or 11, 64-bit.
- Each reader that reads scanned drawings uses about 0.8 GB of memory. Sleuth starts more readers only while there is memory free, and the window itself uses about 150 MB.
- About 300 MB of disk for the program. The index is kept in the office folder, not on your PC.
- The office folder `U:\Sleuth-cache` mapped and writable.

3 First-time setup

Two things need to be right: the office index folder, and the folders you want Sleuth to read. Both take a minute.

Step 1: the office index folder

Sleuth uses the office folder `U:\Sleuth-cache` automatically. If your PC has `U:` mapped, there is nothing to do. If it doesn't, Sleuth shows a yellow message at the top of the window. If you leave it, Sleuth opens Settings and highlights the place to fix it:

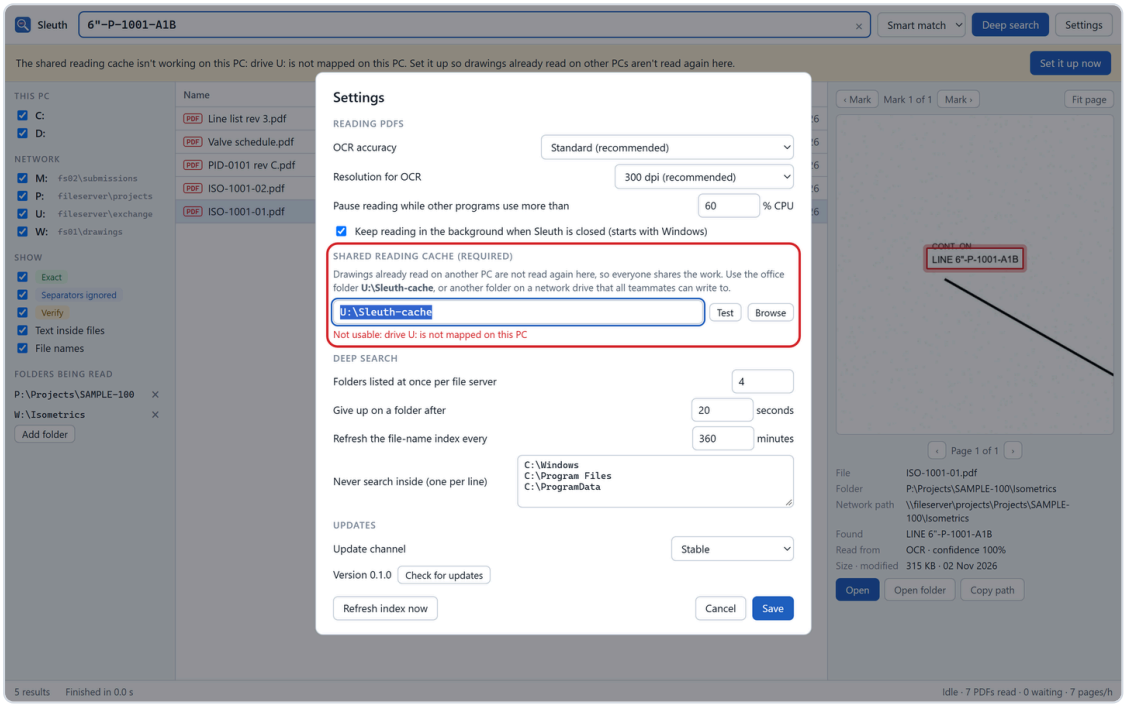

Sleuth won't let this go: until the office folder works, it asks every minute. Section 16 explains why. (Screenshot from version 1.0, where the section was called "Shared reading cache".)

1. Type the folder IT gave you, or click **Browse** to pick it. It must be on a network drive everyone can write to.
2. Click **Test**. "Working" in green means it's right.
3. Click **Save**. Sleuth refuses to save a folder that doesn't work, and tells you why.

Step 2: choose the folders to read

Sleuth always knows the **names** of files on all your drives. To search **inside** files, they have to be read first, and your PC only reads the folders you choose. Add the project folders you work in:


1. In the left pane, under **Folders being read**, click **Add folder**.
2. Pick the folder, for example `P:\Projects\SAMPLE-100`. Sleuth starts reading its documents in the background.
3. To stop reading a folder, click the × next to it.

How long does reading take?

Spreadsheets, Word files, emails, CAD files and PDFs with a text layer are read in seconds, many at a time. A scanned A1/A3 sheet takes a few minutes of processor time. A document already read by another PC is not read again. You can search at any time; results improve as reading continues.

4 A tour of the window

Sleuth's window has a search bar at the top and three panes below it.

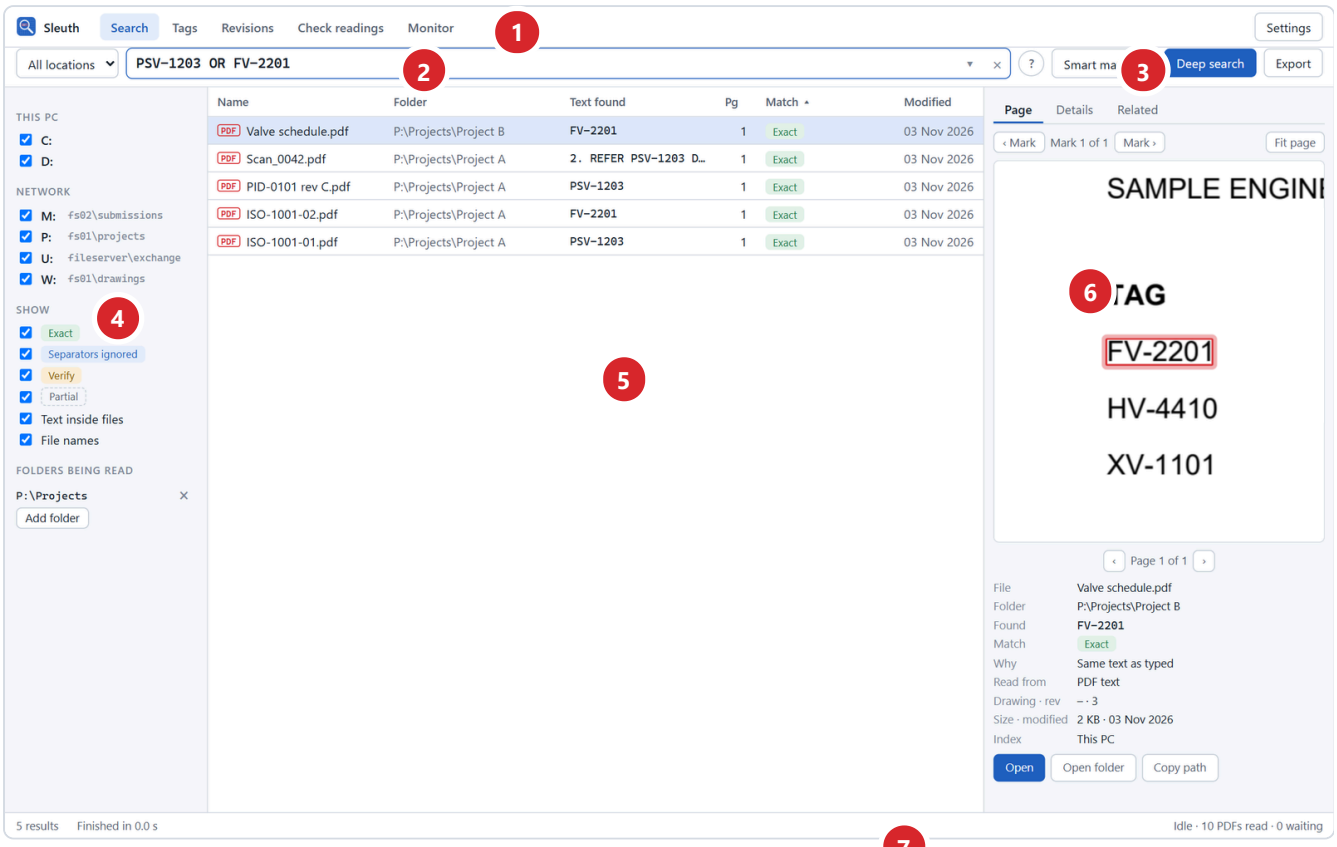

A search for two tags at once. The numbers match the table below.

#	Part	What it does
1	Views	**Search**, **Tags**, **Revisions**, **Check readings** and **Monitor** (sections 10 to 14).
2	Project and search box	Pick a project, or **All locations**. Type a tag or any text; results appear as you type. `Ctrl` + `F` jumps here. **?** shows the search syntax; ▾ shows recent and pinned searches.
3	Smart match, Deep search, Export	**Smart match** also finds tags written differently; **Exact only** hides those. **Deep search** walks the drives live (section 8). **Export** saves the results to Excel or CSV.
4	Locations and filters	Tick the drives to search. Show or hide result types. Manage **Folders being read**.
5	Results	One row per file: name, folder, the exact text found, page and match type. Hover a row to see why it matched. Click a column heading to sort.
6	Preview	**Page**: the page with the text circled in red. **Details**: title block and how the file was read. **Related**: drawings sharing tags.
7	Status bar	Number of results, the office server if you use one, and what the reader is doing. Click the reader status for details.

5 Searching

Type what you're looking for. Plain text always works; a few extras narrow things down.

What you can search for

Looking for	Type	Notes
A line number	`6"-P-1001-A1B`	Quotes, dashes and spaces are optional: `6P1001A1B` works too.
An instrument or valve tag	`PSV-1203` , `FV 2201`	A tag typed with a space is still found.
A document number	`DOC-1001-17`	Finds the document itself and every drawing that refers to it.
A drawing number or file name	`ISO-1001-02`	File names are searched on every drive, read or not.
Several things at once	`PSV-1203 flare`	Files that contain **all** the words, anywhere in the file.
Any of several tags	`PSV-1203 OR PSV-1204`	`OR` (capitals) or `|` between alternatives.
Drawings by title block	`dwg:ISO-1001 rev:C`	Drawing number contains, revision. Also `disc:piping` .
Only one kind of tag	`type:instrument FV`	Kinds: line, instrument, valve, equipment, support, weld, drawing, spec.
Words in the file name	`name:datasheet`	`ext:pdf` limits the file type.
An exact phrase	`"rev c"`	Put the phrase in double quotes. An inch mark inside a tag, as in `6"-P` , is never treated as a quote.

Narrowing the results

- **Project**: pick a project next to the search box to search only its folders (section on projects).
- **Drives**: untick a drive in the left pane to leave it out.
- **History**: the ▾ in the search box lists recent searches; pin the ones you use often.
- **Export**: the results to Excel or CSV, with the reason for each match.
- **Show**: hide Exact , Separators ignored or Verify results, or results found only in file names.
- **Exact only**: the drop-down next to the search box hides everything except exact matches.
- **Sort**: click a column heading; click again to reverse.

Keyboard

Key	Does
`Ctrl` + `F`	Go to the search box
`Enter` in the search box	Search now; `Ctrl` + `Enter` runs a deep search
`Esc`	Clear the search
`↓` / `↑`, `Page Down` / `Page Up`	Move through results; the preview follows
`Enter` on a result, or double-click	Open the file

6 How results are labelled, and when to double-check


Every result says how it matched and where the text came from. This is what lets you trust Sleuth on engineering work.

Label	Means	What to do
Exact	The text on the page is exactly what you typed.	Nothing; open it.
Separators ignored	Same letters and digits, written with different dashes, quotes or spaces. `PSV1203` found `PSV-1203`.	Usually right. Glance at the preview.
Verify, OCR unsure	Either the OCR wasn't confident, or a character could be a look-alike (O/0, I/1, S/5, B/8, Z/2, G/6).	**Check the preview** before relying on it.
Partial, verify	Only part matched: your text is inside a longer tag (`PSV-120` in `PSV-1203`), or only part of the tag could be read, for example because a pipe line crosses the size (`-P-1002-A1B` for `4"-P-1002-A1B`).	**Look at the page.** The row's "Why" says which.
Name · ...	Found in the file name, not inside the file.	Useful when the PDF hasn't been read.

Where the text came from

Hover over a result to see why it matched and where the text came from; the preview pane shows both.

- **PDF text**: the PDF carries real text (exported from CAD or Word). Always exact.
- **OCR**: Sleuth read the image of the page, with a confidence percentage. When the main reader was unsure, Windows' own OCR read the line again. If the two disagree, both readings are kept and the result is marked Verify.
- **Checked**: a person typed this reading in Check readings.
- **File name**: matched the name only.

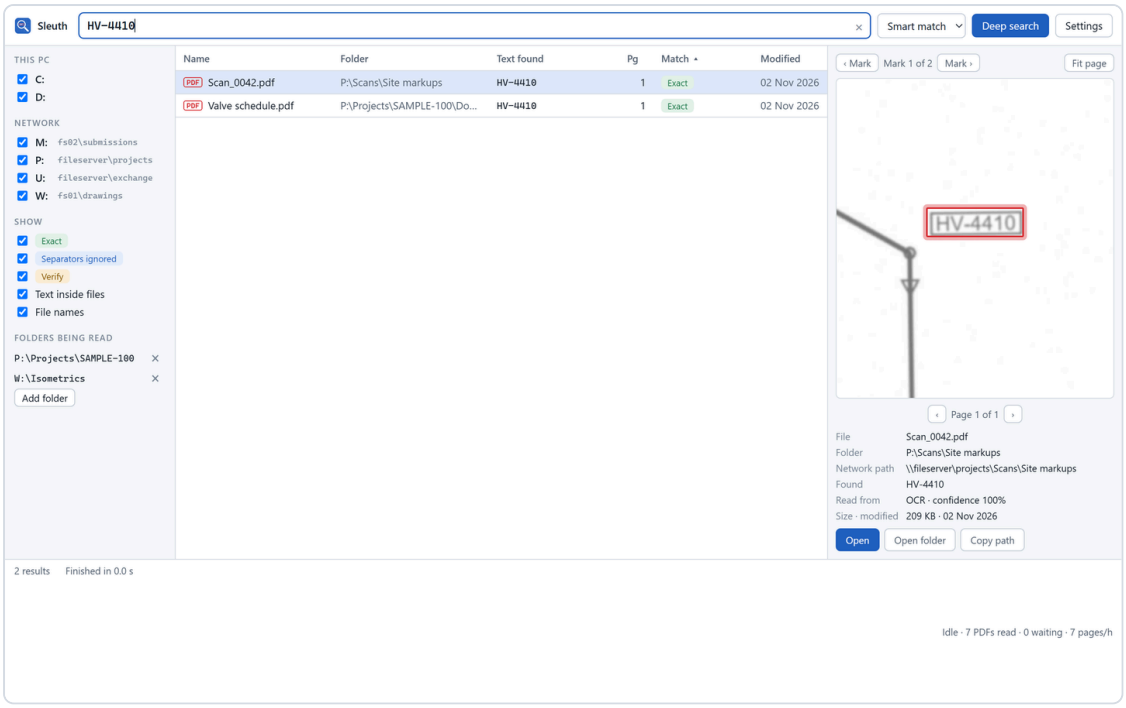

A low-contrast site scan. The tag was read with 100% confidence; the circled mark lets you confirm it in a second.

Rule of thumb

Sleuth never reports an uncertain reading as Exact. If it matters, look at the page: the preview is one click away and always shows the spot.

7 Previewing and opening files


Click a result and the page appears on the right, with the text circled.

In the preview pane

- ‹ **Mark / Mark** › steps between every place the text appears on the page.
- **Zoom to mark / Fit page** switches between a close-up and the whole sheet.
- ‹ › under the page moves between pages.
- The details list the file, its folder, its network path, what was found, how it was read, and its size and date.
- **Open**, **Open folder** and **Copy path** are under the details.
- A spreadsheet, Word file, email or CAD file shows the text read from it instead of a page, with the matching lines marked and their sheet and cell. When the same drawing also has a PDF, **Show the PDF page** opens it; **Open in Excel** (or AutoCAD, MicroStation…) opens the file itself.

Right-click a result

- **Open** or **Open folder** (the file is selected in Explorer).
- **Copy path**, with your drive letter.
- **Copy network path**: the `\\server\share` form, which works on any PC whatever drive letters it uses.
- **Copy text found**: the exact text read.
- **Read this file now**: moves the file to the front of the reading queue.

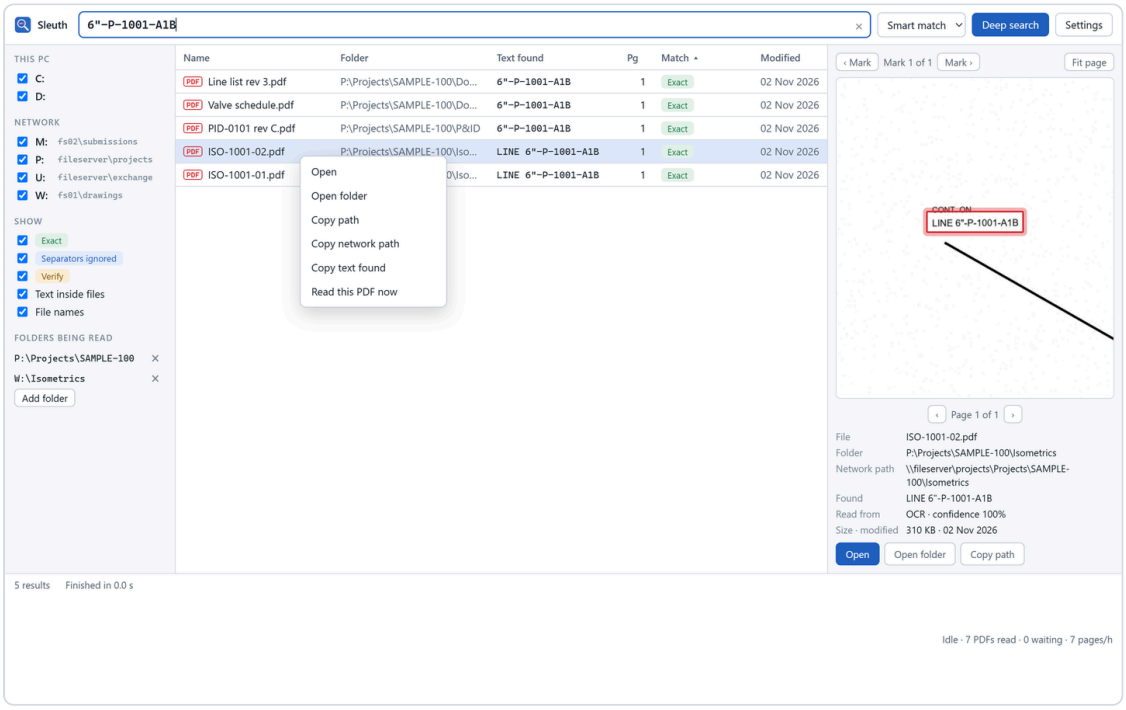


Right-click any result for these actions.

> **Sharing a location with a colleague**
> Use **Copy network path**. Drive letters differ between PCs; the network path doesn't.

8 Deep search: when you don't know where it is

A normal search looks in what Sleuth already knows. A deep search also walks the drives live, right now.

Use it when a file is new, sits outside the folders being read, or may be on a drive Sleuth hasn't listed yet. Type your search and click **Deep search** (or press `Ctrl` + `Enter`).

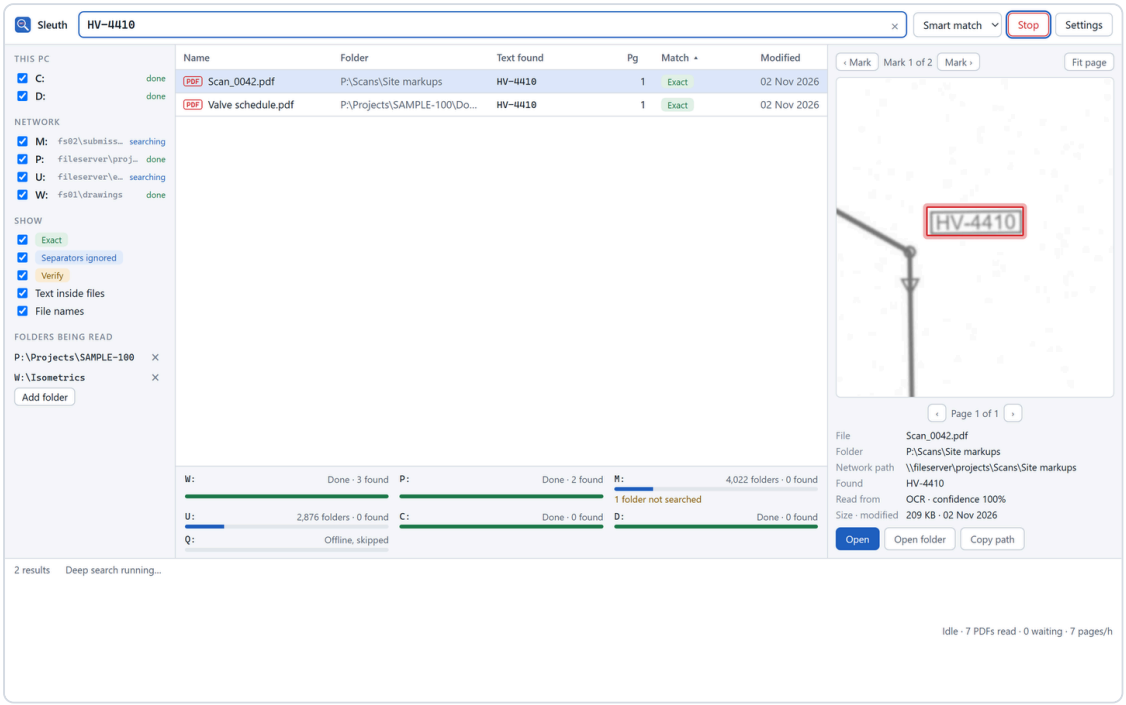

One bar per drive. Finished drives turn green; an unreachable share is skipped in seconds.

- **Progress per drive** shows under the results: folders searched and hits found. The left pane shows each drive's state.
- **Unread PDFs found on the way** are read straight away, ahead of everything else. They join the results as soon as they're read, so leave Sleuth open for a minute after the walk finishes.
- **Offline drives** are skipped after a few seconds instead of hanging the search.
- **Slow or locked folders** are given up on after the time set in Settings, and listed as "folders not searched". Hover over that line to see which ones and why.
- Drives on the same file server share a speed limit, so the server isn't overloaded.
- Click **Stop** at any time. Results found so far stay.

> **Search fewer drives for speed**
> Untick drives you know aren't relevant in the left pane before starting a deep search.

9 Background reading and the index

The Sleuth reader works quietly in the background so searches are instant. You can pause, start and speed up both of its stages.

What the reader does

It works in two stages, both shown in the **status strip** at the bottom of the window. The strip stays visible everywhere and updates every few seconds; click either stage for the details on the Monitor page.

- **Stage 1, Finding files**: lists every folder on every local and network drive, so any file can be found by its name, and checks again every 6 hours. One PC lists each network drive for the whole office and every other PC uses its list; your PC always lists its own disks. File names become searchable as the listing goes, and search says when results may still be incomplete. A listing stopped part-way (PC shut down) carries on where it was, on that PC or another one.
- **Stage 2, Reading documents**: reads the files in your **Folders being read**, newest first. PCs that read the same folder share it out between them, and a document read by any PC is searchable on every PC about a minute later. The strip shows how many are read of the total, how many wait, and the time left. Files you ask for (deep search, "Read this file now") are read at once.
- **Changes**: a file that changes is read again automatically.

What is read inside

Type	What Sleuth reads
PDF	The text layer; scanned pages and pasted scans by OCR.
Excel (`.xlsx .xlsm .xls .xlsb .ods`)	Every cell, with its sheet and cell reference.
Word (`.docx .doc`), PowerPoint (`.pptx .ppt`)	The text, including tables. Old `.doc` and `.ppt` files need Microsoft Office on the PC that reads them.
Outlook emails (`.msg .eml`)	Subject, sender, recipients, date and body.
Text and CSV	The whole file.
AutoCAD (`.dwg .dxf`)	Text, multi-line text and block attributes.
MicroStation (`.dgn` , PDS `.i01` ...)	Text elements. Version 8 files need MicroStation on the PC that reads them; a PC that has it takes them.
Scanned images (`.tif .jpg .png .bmp`)	OCR, every page of a multi-page TIFF.

Settings → **File types read inside** lets you leave a type out; it is then found by name only.

Your controls

Each stage in the status strip has a **Pause or start** menu. The same controls are in Monitor and Settings.


Control	What it does
Pause, Resume	Stops or restarts that stage on this PC. A pause lasts until you resume it, even across restarts. Other PCs carry on.
Find files now	Lists every drive again straight away, to pick up new, moved and deleted files.
Read now	Starts reading at once, without waiting for the file list.
Full speed for 1 hour	Every core for an hour, even while the PC is in use; then back to the speed set in Settings.
Gentle (minimum only)	Reads at the minimum, whatever the PC is doing, until you change it.

Being polite to your PC

- Documents are read by separate reader programs at the lowest processor priority, so Windows gives them only the time you aren't using.
- While other programs keep the CPU busy (above 60% by default), reading carries on at the minimum: one reader for scans and four for other files. It never stops by itself, so the work still gets done. It pauses while the PC runs on battery.
- While the PC is free, the number of readers doubles every 30 seconds, up to the number of cores, and drops back as soon as you need the PC. A new reader starts only while there is memory free.
- A file that crashes or hangs a reader is marked "could not be read"; the other files carry on.
- With "Keep reading in the background" on (the default), the reader keeps going after you close the window, and starts with Windows.

Index status

Click either stage in the status strip to open **Monitor**. It shows each drive (listing, done, partly listed or offline, with the reason), each reading folder with how many of its documents are read, and the files that could not be read and why. A reading folder given by a drive letter that is not mapped on this PC is flagged there.

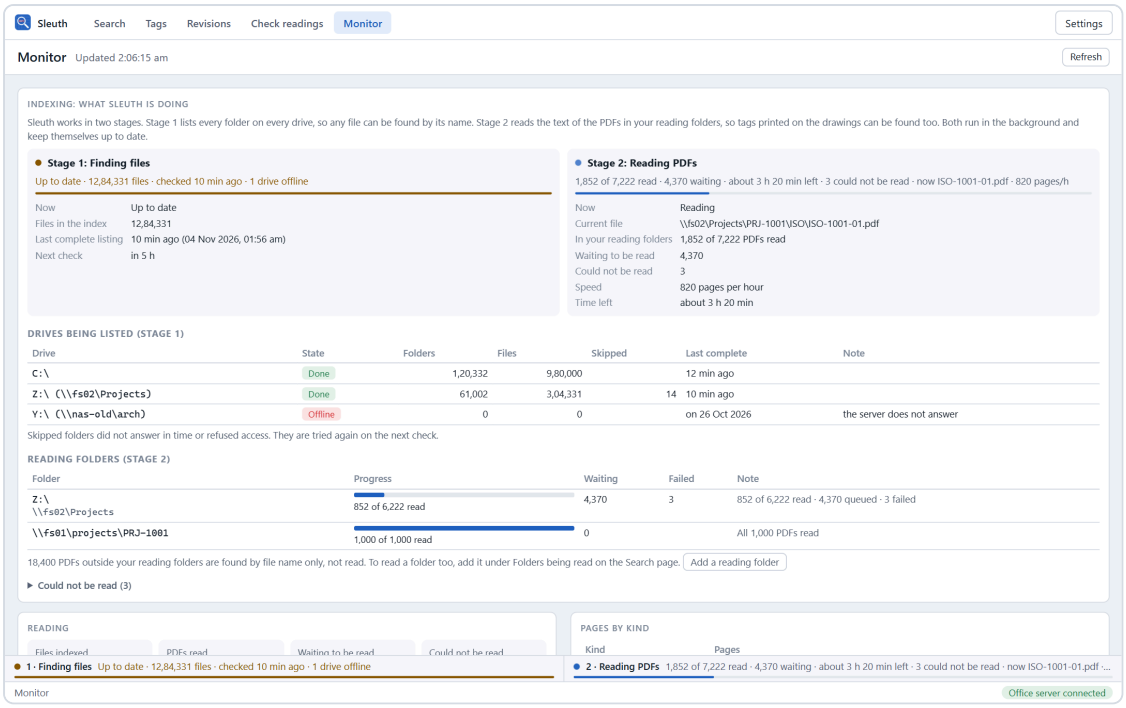


Monitor: what each stage is doing, every drive and reading folder, and files that can't be read, with the reason. (Screenshot from version 1.0.1.)

Reason shown	Meaning
password protected	The PDF is encrypted. Sleuth can still find it by name.
damaged or not a PDF	The file is corrupt, or has a .pdf name but isn't one.
could not be read: …	An Excel, Word, CAD or other file that its reader could not open, or that took too long. The reason follows. A few damaged or very large AutoCAD files end up here.
could not be opened: …	The file moved, is locked, or you have no access. Network hiccups are retried automatically: up to 5 times, at growing intervals, before a file is listed here.

10 Tags: every tag and where it appears

The **Tags** view lists every engineering tag Sleuth has found in the drawings it has read, with the documents and places it appears in.

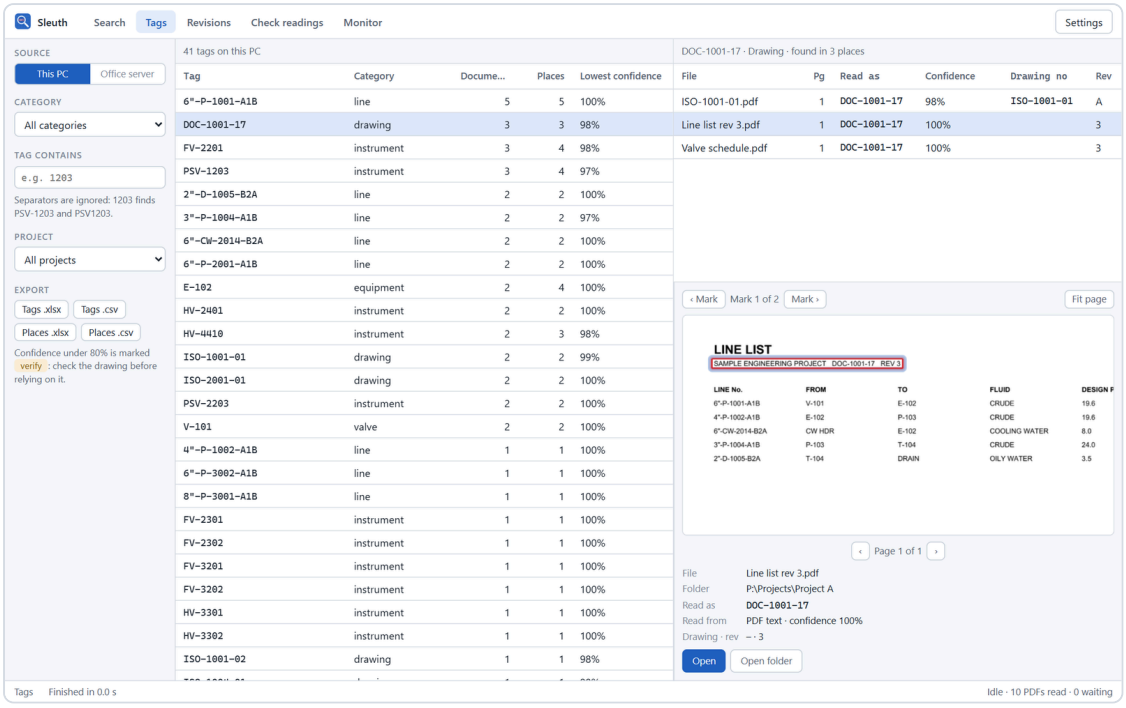


Click a tag to list every place it appears; click a place to see the page with the tag marked.

- **Categories**: line numbers, instruments, valves, equipment, supports, welds, drawing numbers and specs. Sleuth finds them with fixed patterns (rules) applied to the text it read; nothing is guessed. A line number like `6"-P-1001-A1B` is one tag, never also "equipment P-1001".
- **Lowest confidence**: the weakest reading among the places. Under 80% it is marked verify : check those places on the drawing.
- **Filters**: category, "tag contains" (separators are ignored, so `1203` finds `PSV-1203`), project, and **This PC** or **Office server**.
- **Export**: tags or places to Excel (.xlsx) or CSV, for line lists and checks.

> **For the CAD lead**
> If your project numbers tags differently, the rules can be changed in Settings → Advanced (tag rules). Sleuth parses the drawings already read again with the new rules, without reading them again.

11 Revisions: what changed between two issues

The **Revisions** view groups drawings by drawing number and compares the tags of any two revisions.

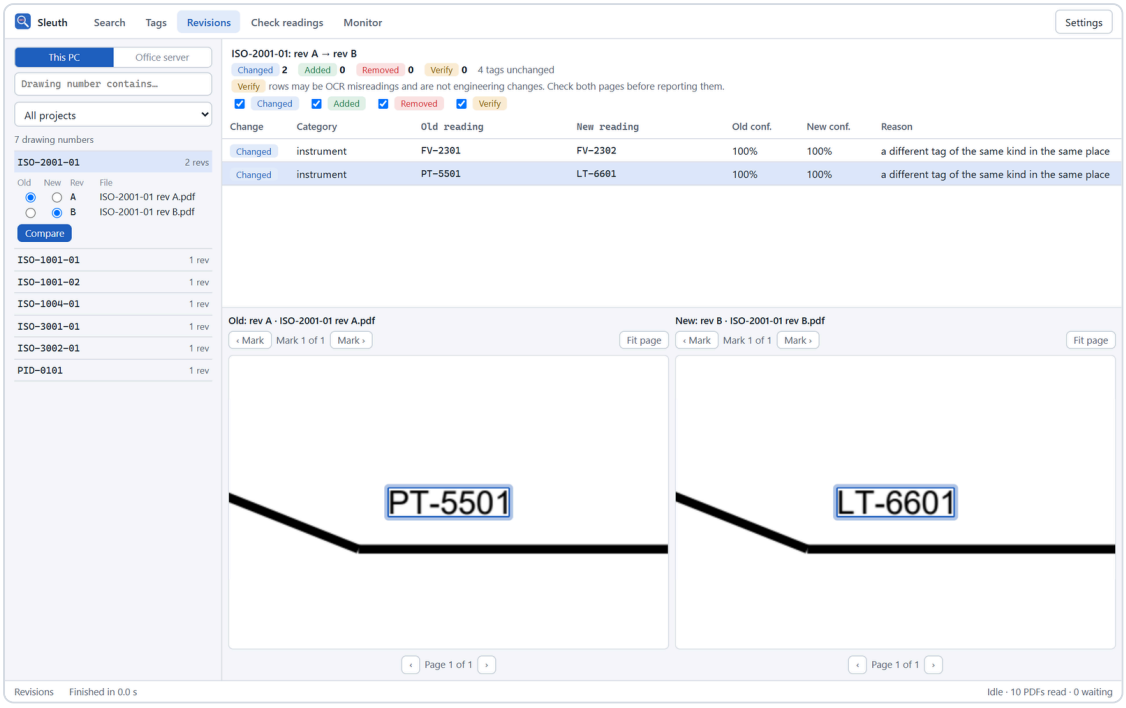

Rev A against rev B. Select a change to see both sheets with the tag marked.

1. Find the drawing number (type part of it in the filter).
2. Expand it. Sleuth lists its revisions oldest first and picks the last two; choose others with **Old** and **New**.
3. Read the changes:


Change	Means
Changed	A different tag of the same kind in the same place on the sheet.
Added / Removed	A tag only in the new, or only in the old revision.
Verify	The difference could be an OCR misreading: the two readings differ only by look-alike characters, or one of them was read with low confidence.

Not an engineering judgement

Sleuth compares what it read. A **Verify** row is never an engineering change until you have looked at both pages. Revision numbers and drawing numbers come from the title block; Details (next section) shows the text each was read from.

12 Details and related drawings

The preview pane has three tabs: **Page**, **Details** and **Related**.

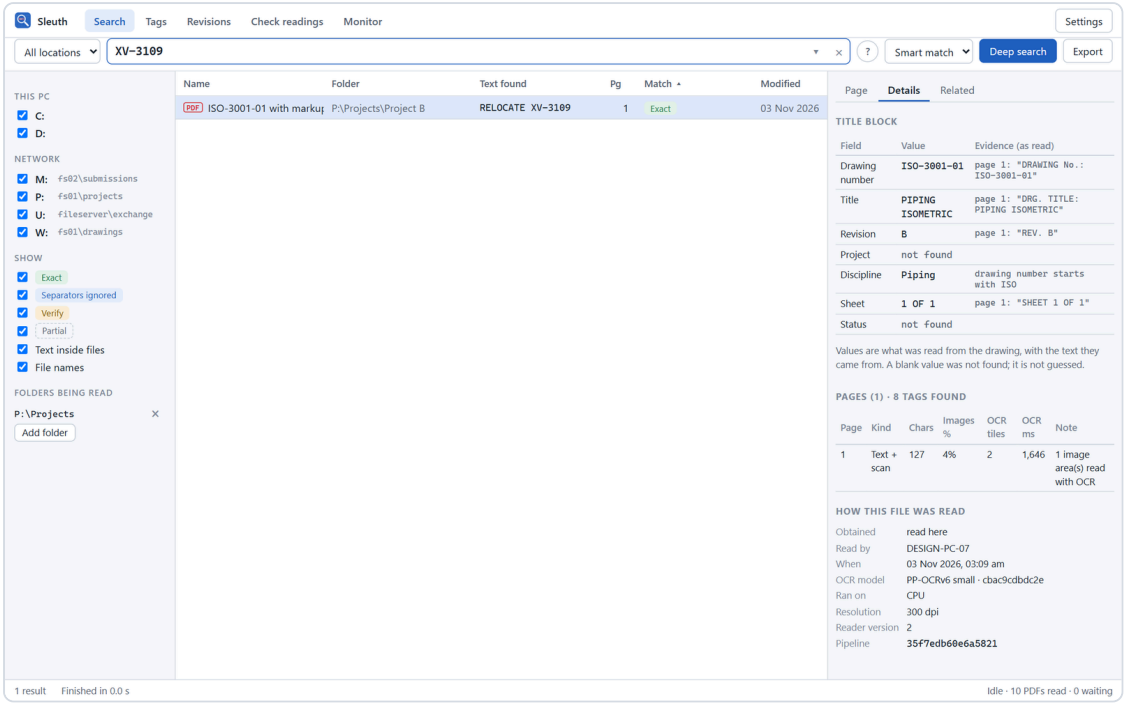

Every value shows the text it was read from. A value Sleuth did not find says "not found"; it is never guessed.

- **Title block**: drawing number, title, revision, project, discipline, sheet and status, each with its evidence (for example `page 1: "REV. B"`, or `OCR 98%` when it was read from a scan).
- **Pages**: what kind each page is and how it was read:

Kind	Means	Read with OCR
Text layer	A plotted or exported PDF with real text	No (only the title block, if its text has no drawing number)
Text + scan	Real text plus pasted images, stamps or scanned mark-ups	Only the images
Scanned	A scan, or a picture of the drawing	The whole page
Outlined text	Text plotted as lines	The whole page
Damaged	The page cannot be opened	No; the reason is shown and the other pages are read

- **How this file was read**: on which PC, when, which OCR model (with its fingerprint), CPU or graphics card, and whether it came from the office folder.
- **Related**: other drawings that share tags with this one (line numbers, instruments, equipment...), most shared first. Click one to open it on the page where a shared tag appears.

13 Check readings


The **Check readings** view lists the lines OCR was least sure of, worst first, with the image of each beside it.

1. Look at the image and the reading. If the second reader (Windows OCR) read it differently, both readings are shown.
2. If the reading is wrong, type the text exactly as printed and click **Save correction**.
3. Searches and the Tags view now find your reading as **checked**. **Undo** removes it.

> **Nothing is learned**
> The original OCR text is kept beside your correction, and the OCR models never change. A correction applies to that file only, as long as its content is the same; if the drawing is replaced, the correction is kept for the record but no longer applied.

14 Monitor

The **Monitor** view shows how reading is going and why: useful when something seems slow or missing.

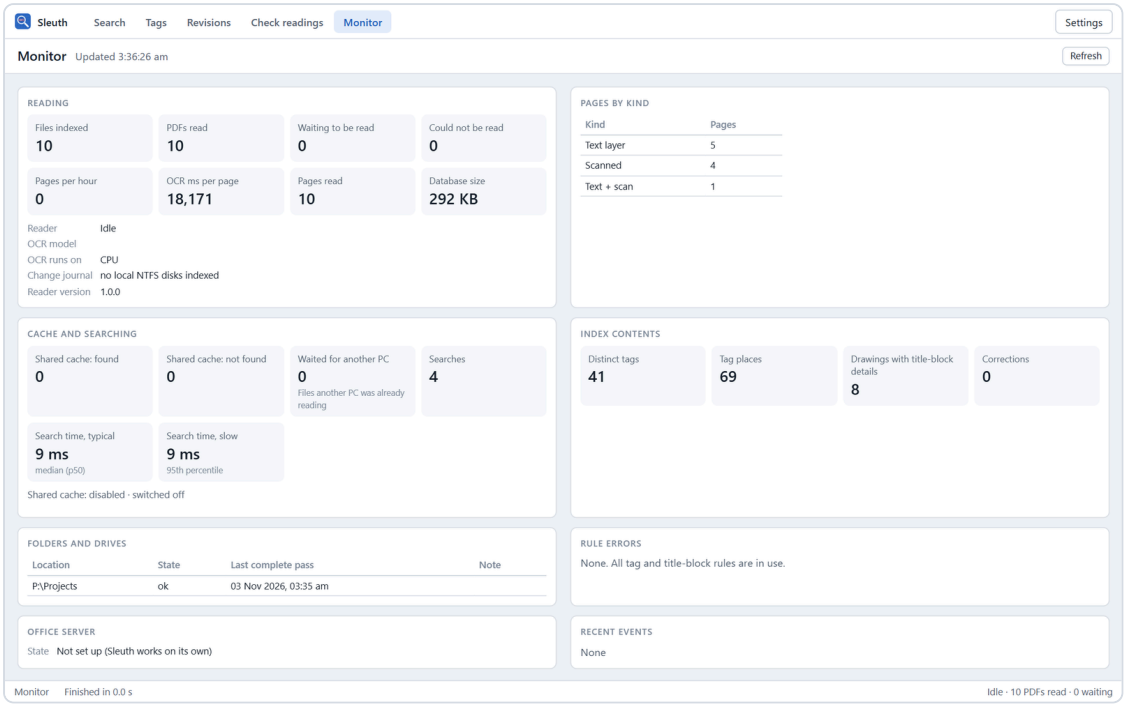


Everything the reader is doing, with the reasons.

- **Office**: every PC that is reading (and the office server, if there is one), what it is doing and how fast, the office's documents an hour and time left, and the size of the office index.
- **Reading**: documents read, waiting and failed, by file type; documents and pages per hour; OCR time per page.
- **OCR runs on**: the CPU, or a graphics card through DirectML. Sleuth uses a graphics card only after it has read a check picture exactly like the CPU and was clearly faster; the line below says why it chose what it chose. A card that fails is not used again.
- **Searching**: search times, and files another PC was already reading (Sleuth leaves them to it instead of reading the same file).
- **Folders and drives**: the last complete pass of each location, which PC lists it, and any that were offline or only partly listed. **Rescan** lists one drive again.
- **Rule errors**: tag or title-block rules that could not be used.

15 Projects and the office server

Both are optional. Sleuth works fully on its own.

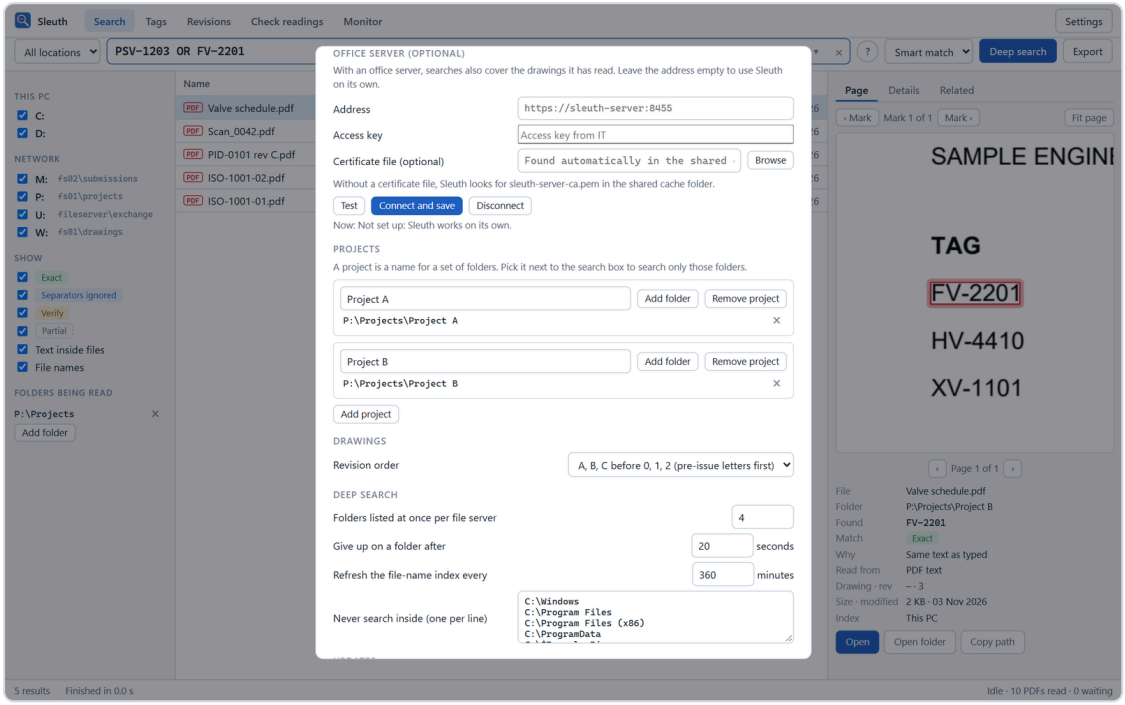

Settings → Office server and Projects.

Projects

A project is a name for a set of folders. Add them in Settings → Projects, then pick the project next to the search box to search only its folders. The Tags and Revisions views have the same project filter.

The office server

If IT runs the Sleuth office server, it reads into the same office index as the PCs, day and night at full speed. Your searches include what it has read, and its projects and access keys work as before.

1. Get the server address and your personal access key from IT.
2. Settings → Office server: enter both. The certificate is found automatically in the office index folder; IT may give you a file instead.
3. Click **Test**, then **Connect and save**. Your key is stored encrypted for your Windows account.

You only see projects IT has given you. If the server is offline, Sleuth says so above the results and keeps searching your own index. **Disconnect** returns to working on your own.

16 The office index folder

Reading a scanned sheet takes minutes. The office index means that time is spent once for the whole office, not once per PC.

The office index lives in one shared folder, by default `U:\Sleuth-cache`. It holds the list of files on every network drive and the text read from every document. Every PC adds what it reads and searches what every other PC has read. Nothing large is kept on your PC.

The index is made of files that are written once and never changed afterwards, so many PCs can add to it at the same time over the network without damaging it. Scanned drawings are also matched by their content, so a copied or renamed drawing is not read again.

Why Sleuth insists on it

Without the office folder, there is nothing to search inside documents. So it is required. If it isn't set up, Sleuth:

1. shows a yellow message with **Set it up now**;
2. after a minute, opens Settings with the office index section highlighted;
3. won't save a folder that doesn't work.

If the folder is only temporarily unreachable (you're off-site, or the server is down), Sleuth says so: **searching text inside documents resumes when it is back**. What your PC reads meanwhile is kept on your PC and added to the office index when the folder is back.


Upgrading from 1.0

Version 1.0 kept a full index on each PC, often 5 to 6 GB. When you install 1.1, your PC moves the readings it already has into the office index, checks that they arrived, and then deletes its old index. Nothing is read again.

> **Don't delete files in the office index folder**
> They're the office's index. Deleting them makes every PC list the drives and read those documents again.

17 Settings reference

Open with **Settings** at the top right.

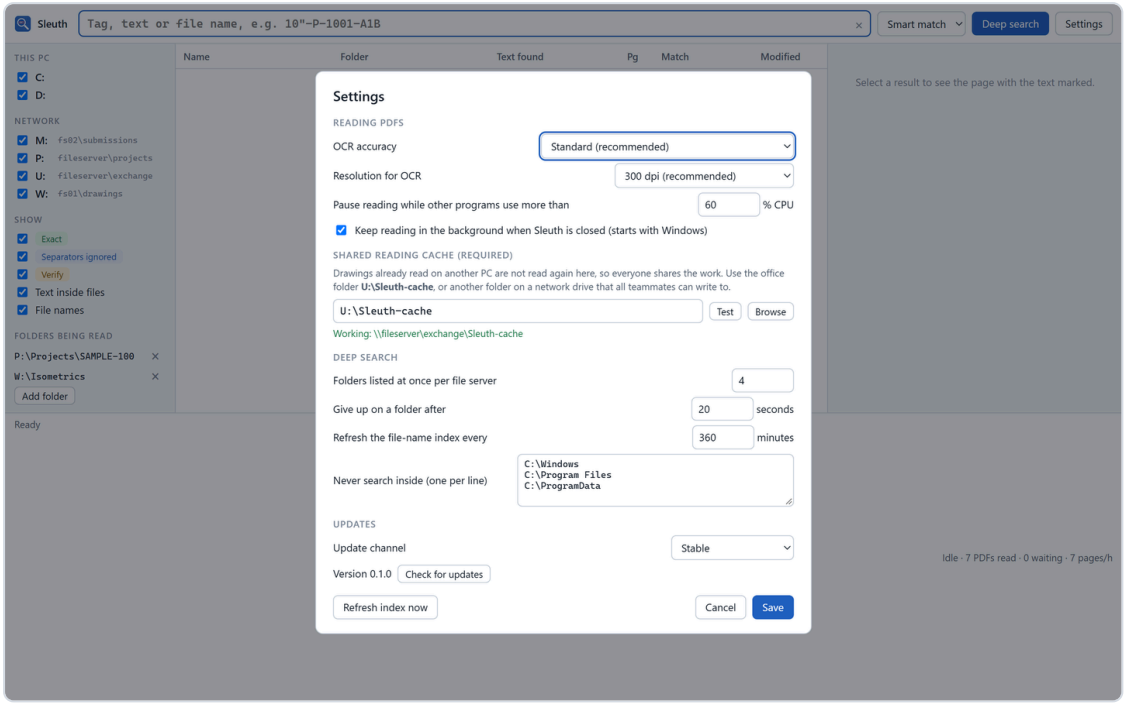

The Settings window.

Setting	What it does	Default
OCR accuracy	**Standard** is recommended. **High** uses a larger model, downloaded once (140 MB); it is about 3× slower and found no extra text in our tests.	Standard
Resolution for OCR	300 dpi reads 2.5 mm text on A1/A3 sheets reliably. Use 400 dpi only for very small print; it is slower.	300 dpi
Reading speed	**Automatic** reads as fast as the PC allows without getting in your way. **Gentle** keeps to the minimum. **Full speed** uses every core, even while the PC is in use.	Automatic
Read at the minimum while other programs use more than …	Reading drops to the minimum while your PC is busy with other work. It never stops by itself.	60% CPU
Keep reading in the background	The reader keeps working when the window is closed, and starts with Windows.	On
File types read inside	Unticked types are found by file name only.	All ticked
Office index folder	The shared folder that holds the office index. Required; see section 16.	`U:\Sleuth-cache`
Folders listed at once per file server	How hard deep search works each server. Raise for speed, lower if a server struggles.	4

Give up on a folder after	A folder that doesn't answer in this time is skipped and listed.	20 s
Check the drives for new files every	How often the drives are listed again.	360 min
Never search inside	Folders Sleuth never walks or reads, one per line.	Windows and program folders
Update channel	**Stable** for everyone. **Development builds** only if you're testing new versions.	Stable
Find files now	Lists every drive again straight away, in the background.	

18 Updates

Sleuth keeps itself up to date. Your settings are always kept.

- Sleuth checks for a new version by itself: 10 seconds after it starts, then every hour. You never need to look for one.
- When there is one, Sleuth downloads it in the background and checks it against the published checksum. Then it asks: **Restart and update** or **Later**.
- **Later** leaves an **Update ready** button in the status bar and a blue bar at the top; click either when it suits you. Sleuth asks again the next time it starts.
- Updating stops the reader, installs and starts Sleuth again, usually in under a minute, and Sleuth then says it was updated.
- **Settings** → **Check for updates** checks straight away.
- The Windows "protected your PC" prompt does not appear for in-app updates.

Rolling back

If a new version causes trouble, **Settings** → **Updates** → **Roll back to version X** reinstalls the release before it, checked the same way. Settings are kept. Rolling back from 1.1 to 1.0 makes your PC build its own 1.0 index again: it lists every drive once more, and scanned drawings already read come back from the office folder without OCR.

> **Never lose your setup**
> Updates only replace program files. `settings.json`, your folders being read, and the office index stay exactly as they were.

19 Troubleshooting and FAQ

Problem	What to do
A drawing I know has the tag isn't found	Is its folder in **Folders being read**? If not, add it, or right-click the file and choose **Read this file now**. Is its type ticked in Settings → File types read inside? If you don't know where it is, use **Deep search**. Also try **Smart match** rather than Exact only.
Results say "Verify, OCR unsure"	Open the preview and read the tag yourself. Faint, skewed or handwritten text is harder to read; the label tells you to look.
"The office index folder isn't set up"	Map `U:` or choose the folder IT gave you, in Settings → Office index folder → **Test** → **Save**.
"The office index folder is not reachable"	`U:` is down or disconnected. Check it in Explorer. Searching inside documents resumes by itself when it is back.
Reading seems slow	Scans take minutes of processor time per sheet; other files take seconds. Reading slows to the minimum while you're busy and runs faster when you step away. The status strip says why it waits and how long is left. **Full speed for 1 hour** speeds it up, and every PC that reads the same folders adds to the speed.
Reading or finding files says "Paused"	Someone paused it on this PC. Click **Resume** in the status strip.
A drive shows "Offline, skipped"	The share didn't answer. Check it in Explorer; when it's back, search again.
"N folders not searched"	Those folders were locked or too slow. Hover to see them. Raise "Give up on a folder after" if a server is just slow.
The window says the reader is restarting	Wait a few seconds; Sleuth restarts the reader automatically.
Windows blocked the installer	Click **More info** → **Run anyway**. This happens only for the first install.
One file was read wrongly	Right-click it and choose **Read this file now**, or correct the reading in **Check readings**. Don't delete the office index; it belongs to the whole office.

Questions people ask

Does Sleuth send my drawings anywhere? No. Everything is read on the office's own PCs. Results are stored in the office index folder. Nothing goes to the internet; the only internet traffic is checking GitHub for updates.

Does it change my files? Never. Sleuth only reads files.

Can it search DWG or Word files? Yes, from version 1.1: Excel, Word, PowerPoint, emails, text, AutoCAD, MicroStation and scanned images are read inside, as well as PDF. Any other file is found by name.

Why does one row show PDF · DWG · DGN? They are the same drawing: the same drawing number and revision in the title block, or the same file name in the same or a neighbouring folder. Each label opens its own file. Untick **One row per document** to see every file on its own row.

Why does a file appear once even if the tag is on five pages? One row per file keeps the list readable. The preview steps through every mark and page.

20 Your data, privacy and uninstalling

- **On your PC**: settings in `%APPDATA%\Sleuth`; a few MB of working files and logs in `%LOCALAPPDATA%\Sleuth`.
- **On the network**: the office index in the office index folder, readable by the office.
- **On the internet**: nothing, except update checks to GitHub.
- **Logs**: `%LOCALAPPDATA%\Sleuth\logs\worker.log` is useful to IT when something goes wrong.

Uninstalling

Settings → Apps → **Sleuth** → Uninstall. This removes the program, Start-menu entry and start-up entry. Your settings are left in place in case you reinstall; delete the two folders above to remove them too. The office index stays: it belongs to the office.

21 Quick reference card

Print this page and keep it by your desk.

I want to…	Do this
Find a tag	Type it. Dashes, quotes and spaces are optional.
See where it is on the sheet	Click the result; the red circle marks it. **Mark ›** for the next one.
Open the drawing	Double-click, or `Enter`.
Open its folder	Right-click → **Open folder**.
Send a colleague the location	Right-click → **Copy network path**.
Search everywhere, live	**Deep search**, or `Ctrl` + `Enter`.
Make a folder searchable inside	**Folders being read** → **Add folder**.
Read one file right now	Right-click → **Read this file now**.
Pause or speed up reading	Status strip → **Pause or start** → Pause, **Read now** or **Full speed for 1 hour**.
Check what's been read	Click either stage in the status strip.
Find any of several tags	`PSV-1203 OR PSV-1204`
Only this project	Pick it next to the search box.
See every place a tag appears	**Tags** view → click the tag.
Compare two revisions	**Revisions** view → expand the drawing number.
Fix a wrong OCR reading	**Check readings** → type the text → **Save correction**.
Fix the office index folder	Settings → Office index folder → **Test** → **Save**.

Label	Trust it?
Exact	Yes.
Separators ignored	Usually; glance at the preview.
Verify, OCR unsure	Check the page yourself before relying on it.

Sleuth 1.1 · Dexterity Design Services Pvt. Ltd. · Screenshots show Sleuth's own interface with results read from sample drawings; folder and server names are examples. Latest version and this guide: github.com/dexterity-admin/Sleuth